Southwire®

40010S & 40020S

RECEPTACLE TESTERS

Quickly identifies the most common wiring faults in standard 3-wire outlets.

EASY TO USE
Simply plug into a live outlet

EASY TO READ
Indicator LED's and wiring legend quickly identify fault

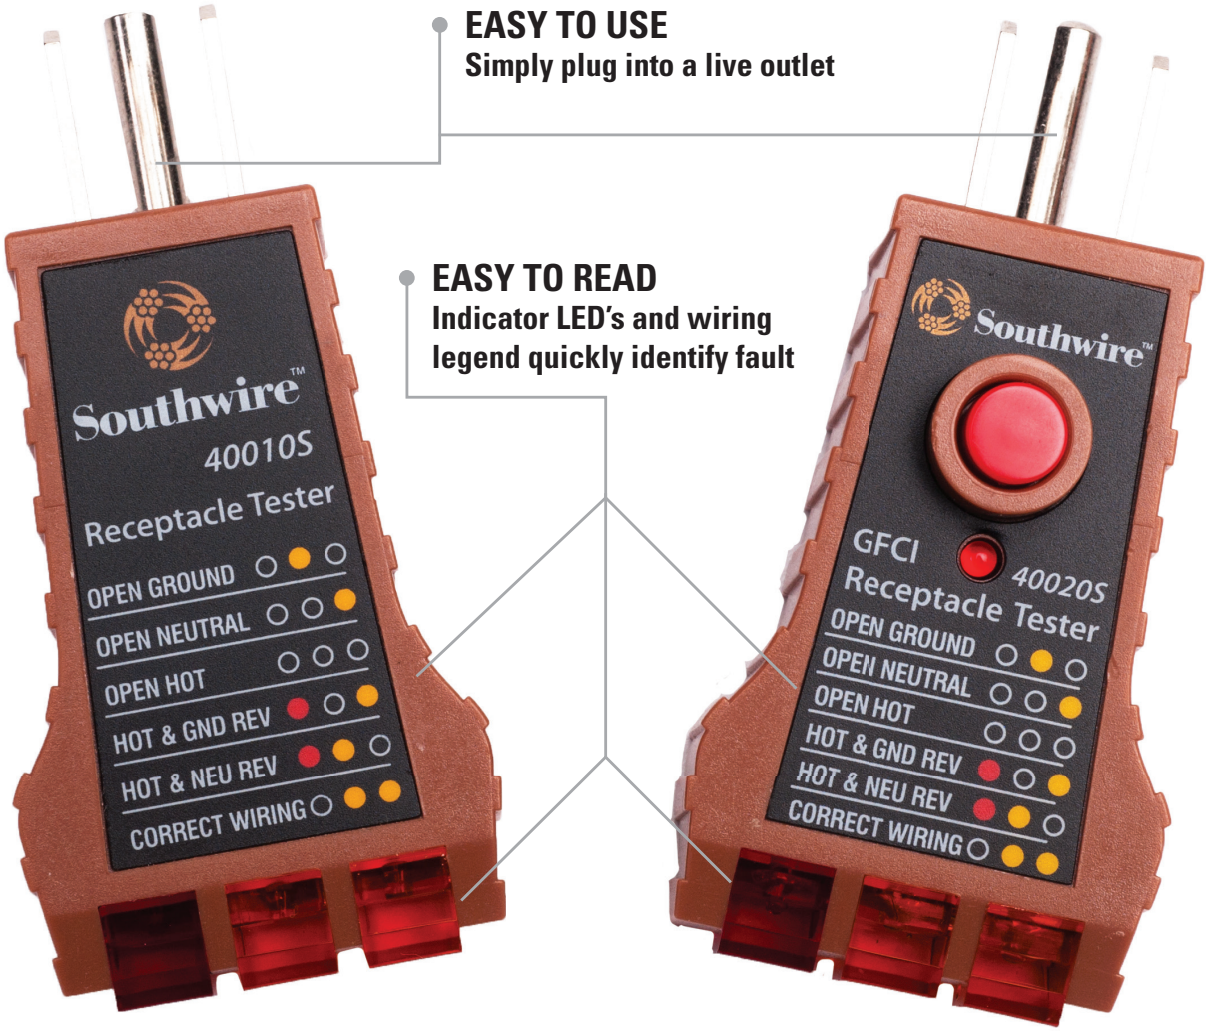

CAT II 125V UL61010-1 SAFETY RATED

c UL us LISTED

Southwire™
TOOLS & EQUIPMENT

BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™

1-855-SWTOOLS
(855-798-6657)

Southwiretools.com

©2015 Southwire Company, LLC. All rights reserved. Trademark of Southwire Company, LLC.

Southwire®

40010S & 40020S

RECEPTACLE TESTERS

Features

- Identifies wiring errors in standard 3-wire receptacles
- For use on 120V AC outlets
- GFCI Test (40020S only) - verifies operation of GFCI protected outlets
- UL Listed

40010S

40020S

Specifications

HEIGHT	3.43 in. (87mm)
WIDTH	1.73 in. (44mm)
DEPTH	0.95 in. (24mm)

INDICATOR LIGHT GUIDE

LED INDICATOR	FAULT	REASON FOR WIRING FAULT
○●○	Open Ground	Ground terminal is not connected
○○●	Open Neutral	Neutral terminal is not connected
○○○	Open Hot	Hot terminal is not connected
●○●	Reversed Hot Ground	Hot and ground connections are interchanged
●●○	Reversed Hot Neutral	Hot and neutral connections are interchanged
○●●	Correct	Receptacle is wired correctly

Southwire™

TOOLS & EQUIPMENT

BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™

1-855-SWTOOLS
(855-798-6657)

Southwiretools.com

©2015 Southwire Company, LLC. All rights reserved. Trademark of Southwire Company, LLC.