The Hillman Group
10590 Hamilton Ave.
Cincinnati, OH 45231

Toll Free: 1.800.800.4900
Phone: 513-851-4900
Fax: 513-851-4997
Website: hillmangroup.com

Item # 47807, 1/4 x 10 TimberTite™ Landscape Screw

The All in One Wood Fastener. Replaces spikes and rebar.

No pre-drilling. 500 Hour Ceramic Coat, Removable and Reusable
Note: Each blister card includes 10 screws and one 5/16 hex driver.

Specifications | Weather Maxx | Working Tips

Specifications

Size	1/4 x 10
Finish	Ceramic Coat
Packaging	Carded
Driver Bit Size	5/16" Hex
Pieces per Card	10
Cards per Master	3

UPC	008236696141
For Use With	Treated Lumber

Weather Maxx

Better
Ceramic Coated screws

- Provides superior rust and corrosion protection.
- Recommended for ACQ, CA, and CCA treated lumber. Also recommended for cedar and redwood construction.
- Provides multiple layers of zinc and polymer based coatings that ensure corrosion protection.
- Conforms with I.C.C.-E.S. reports that allow for use of triple coated zinc polymer fasteners in contact with treated wood.
- Exceeds 1000 hour salt spray test under ASTM B117.

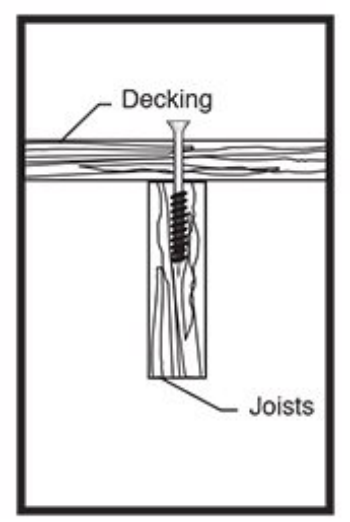

Working Tips

Wood Working Tips - Understanding the Term "Extractive Bleeding"

Cedar and Redwood contain high levels of water soluble tannins that help give the wood their natural decay resistant qualities. Tannins become active and bleed to the wood surface when the surface has been penetrated or if there has been a drastic change in weather conditions. This is called extractive bleeding. When this occurs, tannins can cause visible staining if they contact bare steel, galvanized

steel, or finishes such as latex stains or paints at the wood surface where the bleeding originates. Extractive bleeding cannot be prevented or controlled. The use of Ceramic Coated Screws and Stainless Steel Deck Screws greatly reduces the risk of staining. These fasteners prevent extractive bleeding through the use of corrosion resistant materials and finishes.