

COSMOS

06-4089HS / 06-4089HSSN
ROMAN TUB FAUCET



PVD SATIN NICKEL




POLISHED CHROME

FEATURES

- TWO LEVERS WITH HAND HELD THREE SETTING SHOWER HEAD AND DIVERTER ON TUB SPOUT
- AVAILABLE IN POLISHED CHROME AND PVD SA TIN NICKEL
- 4-HOLE TUB DECK MOUNT
- CERAMIC CARTRIDGE
- HAND HELD SPRAY MAXIMUM FLOW RATE: 2.5 GPM/ 9.5 LPM @ 80 PSI
- TUB SPOUT MINIMUM FLOW RATE: 2.4 GPM/9.0 LPM @ 20 PSI
- SOLID BRASS & COPPER WATERWAYS
- FACTORY PRESSURE TESTED

- cUPC CERTIFIED

CRITICAL DIMENSIONS NOT TO SCALE

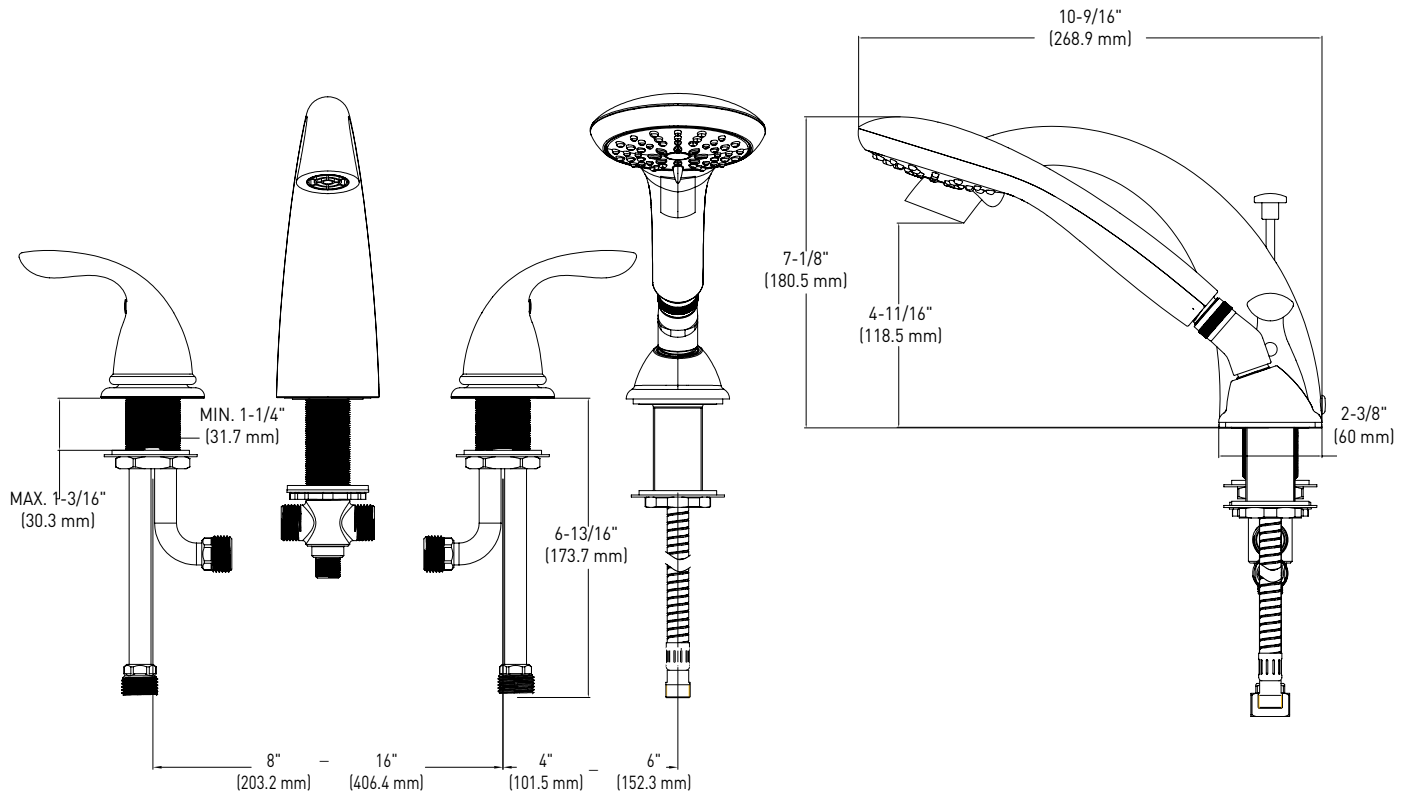

CONSTRUCTION

- METAL CONSTRUCTION WITH POLISHED CHROME FINISH OR PVD SATIN NICKEL FINISH
- BRASS VALVE BODIES

MOUNTING

- DESIGNED TO INSTALL THROUGH 4 HOLES, 1-1/4" [32mm] MIN. DIA. ON DECKS UP TO 1-9/16" [40mm]
- FOR INSTALLATIONS FROM 8" [203mm] TO 16" [406mm] CENTERS

INLET

- 1/2"-14 NPSM THREADED MALE INLET SHANKS

OPERATION

- QUARTER-TURN LEVER STYLE HANDLES
- OPERATES WITH LESS THAN 5 LBS. OF FORCE

WATER-CONTROL MECHANISM

- CARTRIDGE
- CERAMIC DISC VALVES

FLOW

- SPOUT DESIGNED TO DELIVER MINIMUM 2.4 GPM [9 L/MIN.]
- HAND SHOWER MEETS 2.5 GPM MAX. [9.5 L/MIN.]

CODES/STANDARDS APPLICABLE

- cUPC CERTIFIED
- ASME A112.18.1/CSA B125.1

GUARANTEE

- LIMITED LIFETIME GUARANTEE AGAINST DEFECTS IN MATERIAL AND WORKMANSHIP TO ORIGINAL CONSUMER PURCHASER
- 5 YEAR WARRANTY IF USED IN INDUSTRIAL, COMMERCIAL AND BUSINESS INSTALLATIONS



DESCRIPTION	POLISHED CHROME	PVD SATIN NICKEL	CASE QTY.
TWO LEVER HANDLE ROMAN TUB FAUCET WITH HAND HELD THREE SETTING SHOWER HEAD AND DIVERTER ON TUB SPOUT	06-4089HS	06-4089HSSN	2

