

# Thermoplastic Sewage Pump

With Tethered Switch

## Handles up to 2" Solids

Virtually clog-free discharge

## Thermoplastic Construction

For corrosion resistance

## High-Efficiency Motor

With overload protection

## Tethered Float Switch


Piggyback controls allow for manual operation



**4/10 HP** 5250 GPH  
FPSE3200A

PERFORMANCE (GPH)						FLOAT SWITCH		SOLIDS HANDLING
DISCHARGE HEIGHT ABOVE PUMPING LEVEL	0'	5'	10'	15'	MAX. LIFT	ON	OFF	
<b>FPSE3200A</b>	5250	3900	2550	960	18'	17.25"	9.5"	2"

MODEL	WARRANTY	UPC	CARTON DIMENSIONS	PALLET QTY.	WEIGHT
<b>FPSE3200A</b>	1 YEAR	022315102019	10.5" x 16.3" x 7.1"	50	12 LBS.

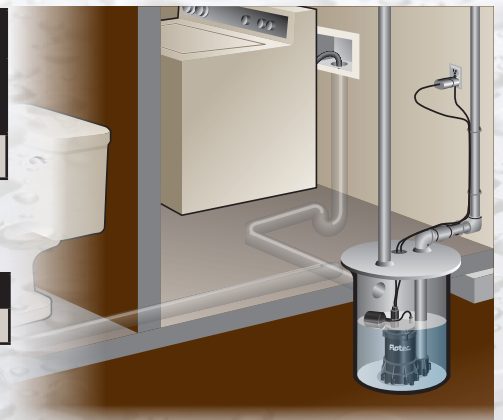

Includes:

2" discharge (meets standard code approvals),  
10' power cord for easy installation,  
detailed owner's manual

Check valve replacement recommended